

Maverick Pipe schedule 40 PVC, which is manufactured in compliance with UL651 and ASTM 1784 specifications, sets the standard for durability and reliability in both underground and above ground applications. Designed to withstand the harshest conditions, our rigid Nonmetallic PVC conduit is built to resist corrosive forces and ensure that the conduit maintains its structural integrity over time, even when exposed to moisture, sunlight, chemicals, or other corrosive elements.

- UL 651 file #E530286
- NEMA TC2
- Sunlight resistant per UL651
- Manufactured with one integral solvent-weld bell standard per length
- UL listed for 90° conductors or cable
- Corrosion resistant
- 10' Lengths (20' lengths available upon request)




Part Number	Size	Average OD in	Minimum Average ID in	Minimum Wall Thickness in	Bell Depth in	Weight Per Foot lbs	Bundle Quantity ft	Weight per Bundle lbs
P40-050	1/2"	0.840	0.578	0.109	1.50	0.165	6,000	990
P40-075	3/4"	1.050	0.780	0.113	1.75	0.220	4,400	968
P40-100	1"	1.315	1.004	0.133	2.00	0.326	3,600	1,174
P40-125	1-1/4"	1.660	1.335	0.140	2.25	0.441	3,300	1,455
P40-150	1-1/2"	1.900	1.564	0.145	2.75	0.528	2,250	1,188
P40-200	2"	2.375	2.021	0.154	3.00	0.730	1,400	1,022
P40-250	2-1/2"	2.875	2.414	0.203	3.25	1.158	930	1,077
P40-300	3"	3.500	3.008	0.216	3.75	1.609	880	1,416
P40-350	3-1/2"	4.000	3.486	0.226	4.00	1.935	630	1,219
P40-400	4"	4.500	3.961	0.237	4.50	2.292	570	1,306
P40-500	5"	5.563	4.975	0.258	5.50	3.105	380	1,180
P40-600	6"	6.625	5.986	0.280	6.12	4.030	260	1,048



Maverick Pipe schedule 80 PVC, which is manufactured in compliance with UL651 and ASTM 1784 specifications, sets the standard for durability and reliability in both underground and above ground applications. Designed to withstand the harshest conditions, our rigid Nonmetallic PVC conduit is built to resist corrosive forces and ensure that the conduit maintains its structural integrity over time, even when exposed to moisture, sunlight, chemicals, or other corrosive elements.

- UL 651 file #E530286
- NEMA TC2
- Sunlight resistant per UL651
- Manufactured with one integral solvent-weld bell standard per length
- UL listed for 90° conductors or cable
- Corrosion resistant
- 10' lengths (20' lengths available upon request)

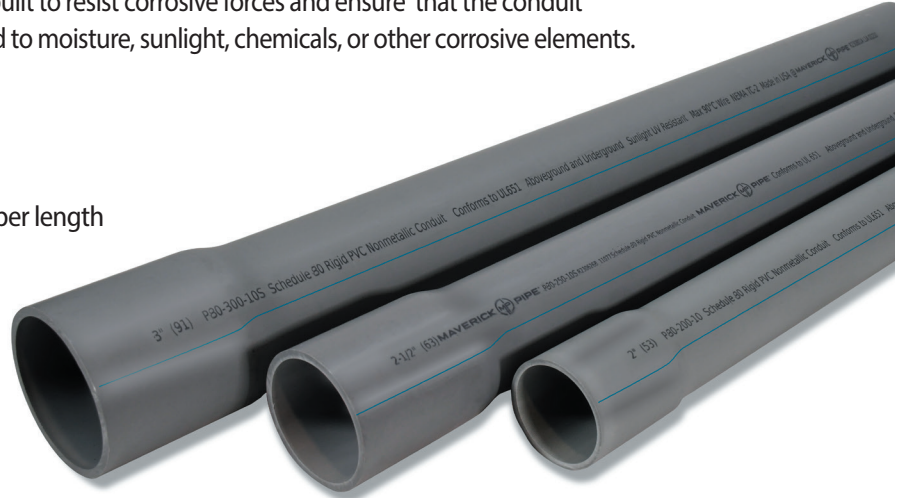

Part Number	Size	Average OD in	Minimum Average ID in	Minimum Wall Thickness in	Bell Depth in	Weight Per Foot lbs	Bundle Quantity ft	Weight per Bundle lbs
P80-050	1/2"	0.840	0.502	0.147	1.500	0.205	6,000	1,230
P80-075	3/4"	1.050	0.608	0.154	1.750	0.278	4,400	1,223
P80-100	1"	1.315	0.910	0.179	2.000	0.410	3,600	1,476
P80-125	1-1/4"	1.660	1.227	0.191	2.250	0.565	3,300	1,865
P80-150	1-1/2"	1.900	1.446	0.200	2.750	0.728	2,250	1,638
P80-200	2"	2.375	1.881	0.218	3.000	1.004	1,400	1,406
P80-250	2-1/2"	2.875	2.250	0.276	3.250	1.531	930	1,424
P80-300	3"	3.500	2.820	0.300	3.750	2.049	880	1,803
P80-350	3-1/2"	4.000	3.280	0.318	4.000	2.499	630	1,575
P80-400	4"	4.500	3.737	0.337	4.500	3.122	570	1,780
P80-500	5"	5.563	4.713	0.375	5.500	4.330	380	1,645
P80-600	6"	6.625	5.646	0.432	6.125	5.954	260	1,548

